

AD-A031 449

CONSTRUCTION ENGINEERING RESEARCH LAB (ARMY) CHAMPAI--ETC F/G 1/3
TECHNICAL BACKGROUND: INTERIM CRITERIA FOR PLANNING ROTARY-WING--ETC (

SEP 76 P D SCHOMER, B L HOMANS

CERL-IR-N-9

NL

UNCLASSIFIED

1 OF 1
AD
A031449



END

DATE
FILMED
12-76


AD A031449

construction
engineering
research
laboratory


12 FG

INTERIM REPORT N-9
September 1976
Prediction and Reduction of the Noise Impact
Within and Adjacent to Army Facilities

**TECHNICAL BACKGROUND:
INTERIM CRITERIA FOR PLANNING ROTARY-WING
AIRCRAFT TRAFFIC PATTERNS AND SITING
NOISE-SENSITIVE LAND USES**

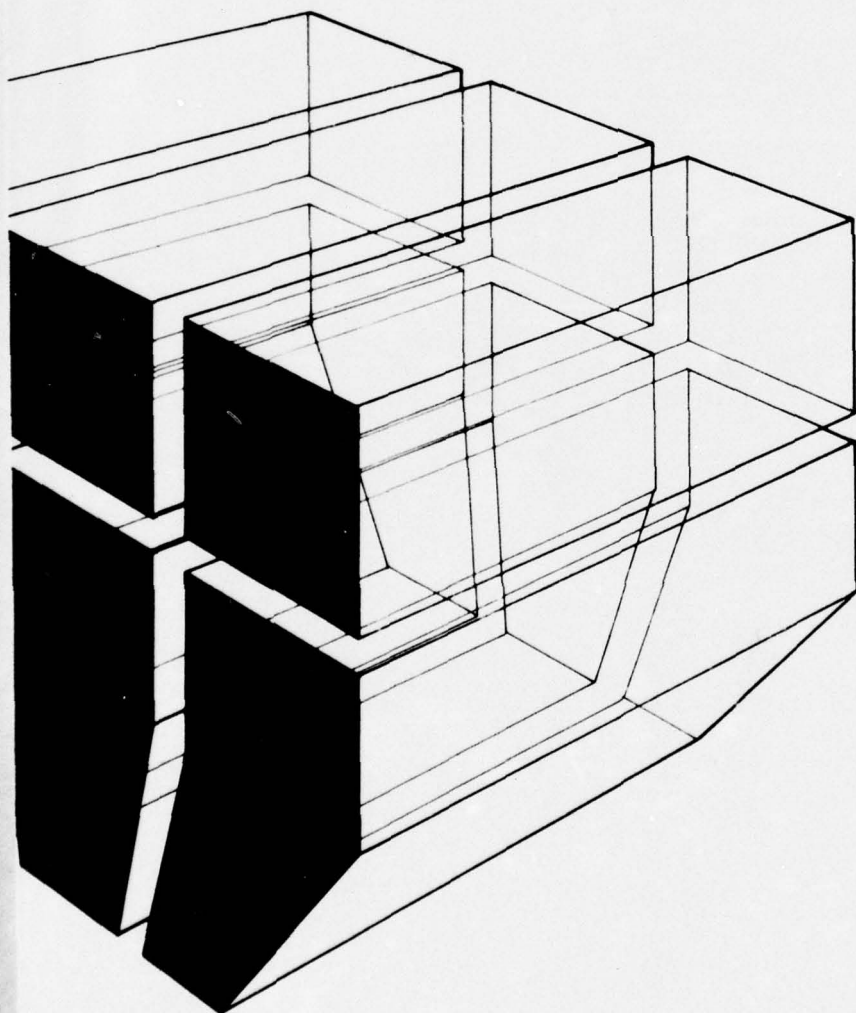

by
P. D. Schomer
B. L. Homans

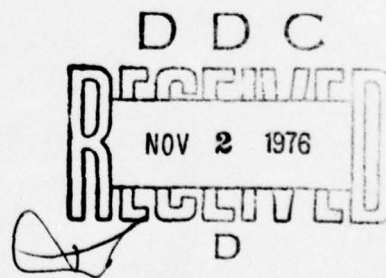

Approved for public release; distribution unlimited.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

***DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED
DO NOT RETURN IT TO THE ORIGINATOR***

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER INTERIM REPORT N-9	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER (9)
4. TITLE (and Subtitle) TECHNICAL BACKGROUND: INTERIM CRITERIA FOR PLANNING ROTARY-WING AIRCRAFT TRAFFIC PATTERNS AND SITING NOISE-SENSITIVE LAND USES.		5. TYPE OF REPORT & PERIOD COVERED INTERIM Rept.
7. AUTHOR(s) P. D. Schomer B. L. Homans		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS CONSTRUCTION ENGINEERING RESEARCH LABORATORY P.O. Box 4005 Champaign, Illinois 61820		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 4A762720A896-02-008
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 14 CERL-IR-N-9		12. REPORT DATE September 1976 13. NUMBER OF PAGES 15 15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 16 DA-4-A-762720-A-896		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 17 4-A-762720-A-89602		
18. SUPPLEMENTARY NOTES Copies are obtainable from National Technical Information Service, Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) rotary-wing aircraft noise noise-sensitive land uses		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report presents interim criteria for locating rotary-wing aircraft traffic pat- terns and ingress and egress corridors into an airfield/heliport to avoid conflict with noise-sensitive land uses, and provides criteria for planners to site noise-sensitive land uses with respect to the established airfield/heliport and established flight corridors. These interim criteria are required because the "exact" Air Force technique for pre-		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

dicting fixed-wing aircraft noise cannot currently be used due to the unpredictability of helicopter flight patterns; these criteria are the basis for interim procedures established in a companion report, *User Manual: Interim Procedure for Planning Rotary-Wing Aircraft Traffic Patterns and Siting Noise-Sensitive Land Uses* (Construction Engineering Research Laboratory Interim Report N-10, 1976).

UNCLASSIFIED

FOREWORD

This research was conducted for the Directorate of Military Construction, Office of the Chief of Engineers (OCE), under Project 4A762720A896, "Environmental Quality for Construction and Operation of Military Facilities"; Task 02, "Pollution Control Technology"; Work Unit 008, "Prediction and Reduction of the Noise Impact Within and Adjacent to Army Facilities." The QCR number is 1.03.011.

Mr. F. P. Beck is the OCE Technical Monitor. Guidance was provided by Mr. J. L. Halligan of OCE.

This study was conducted by the Acoustics Team (Dr. P. D. Schomer, Acting Chief) of the Environmental Division (Dr. R. K. Jain, Chief), U.S. Army Construction Engineering Research Laboratory (CERL).

COL J. E. Hays is Commander and Director of CERL and Dr. L. R. Shaffer is Deputy Director.

ACCESSION for		
RTIS	White Section	<input checked="" type="checkbox"/>
DDG	Buff Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION.....		
BY.....		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL and/or SPECIAL	
A		

D D C

RECEIVED

NOV 2 1976

D

CONTENTS

DD FORM 1473	1
FOREWORD	3
1 INTRODUCTION	5
Background	
Purpose	
2 TECHNICAL BACKGROUND AND APPROACH	5
Measures of Noise Impact	
Definitions of Terms	
Approach	
Operational Considerations	
3 DERIVATION OF CRITERIA AND RESULTS	9
Calculation Procedures	
Results	
Applicability of Results	
4 CONCLUSION	10
APPENDIX A: Discussion of Calculations	11
APPENDIX B: Sample Calculations	13
REFERENCES	15
DISTRIBUTION	

TECHNICAL BACKGROUND: INTERIM CRITERIA FOR PLANNING ROTARY-WING AIRCRAFT TRAFFIC PATTERNS AND SITING NOISE-SENSITIVE LAND USES

1 INTRODUCTION

Background

Urban development has been encroaching on military and civilian airfields in recent years. In particular, residential development has been occurring in areas subject to high noise levels which emanate from aircraft and airfield operations. The Army has an obligation to protect the well-being and safety of persons and property in Army airfield environments, as well as to use public funds judiciously in constructing facilities near airfields.

Since the prediction of rotary-wing aircraft noise impact is still under development, criteria which permit easy interpretation of existing published guidelines are needed. The *Construction Criteria Manual*¹ and the *Air Installations Compatible Use Zones*² are two Department of Defense (DOD) documents that define land-use restrictions. Both documents describe three zones which impose varying degrees of restriction on land use in order to insure its compatibility with the characteristics of Army operations.

The reason an exact prediction technique for rotary-wing aircraft noise does not exist is the unpredictable nature of helicopter flight. Unlike fixed-wing aircraft, helicopters are able to make tight turns and execute sharp maneuvers. Training procedures demand that helicopter pilots be proficient in this flexible form of flight. Fixed-wing aircraft, conversely, have more limited maneuverability; thus a straightforward methodology, such as that of the Air Force,³ can be used in predicting noise impact. The Air Force procedure uses distinct flight paths and other operational information to predict noise impact; it has been found that this system does not work for rotary-wing aircraft because of the impossibility of defining flight paths with current records.

¹Construction Criteria Manual, DOD 4270.1-M (Department of Defense).

²Air Installations Compatible Use Zones, DOD Instruction 4165.57 (Department of Defense).

³R. D. Horonjeff, et al., *Community Noise Exposure Resulting From Aircraft Operations: Computer Program Description*, Report AD/A-004821 (Bolt, Beranek and Newman [BBN], 1974).

These problems notwithstanding, compatibility between land use and noise impact must be achieved to safeguard facilities' operational capabilities while providing satisfactory on- and off-post living environments. Installation master planners and airfield operations personnel must join forces to achieve this result.

Purpose

The purposes of this report are (1) to establish interim criteria for locating rotary-wing aircraft traffic patterns and ingress and egress corridors into an airfield/heliport to avoid conflict with noise-sensitive land uses, and (2) to provide criteria for planners to site noise-sensitive land uses with respect to the established airfield and flight corridor plan. The operations plan (the zones and corridors) established from these criteria will define the "noisy" and "quiet" areas to insure compatible development and future unimpeded airfield capability. This report provides the technical background for the planning manual entitled *User Manual: Interim Procedure for Planning Rotary-Wing Aircraft Traffic Patterns and Siting Noise-Sensitive Land Uses*.⁴

2 TECHNICAL BACKGROUND AND APPROACH

Measures of Noise Impact

Two measures of noise impact commonly used for aircraft noise are Noise Exposure Forecast and Day-Night Equivalent Level.

The Noise Exposure Forecast (NEF) uses Effective Perceived Noise Level (EPNL) as its basic noise measure for aircraft flyovers. EPNL and the number of operations during the day (0700 to 2200 hrs) and night (2200 to 0700 hrs) provide the information necessary to determine NEF at some specified location. As the number of events increases, NEF becomes larger.

Tables and graphs which show EPNL versus distance and allow easy determination of NEF for known aircraft types are available for fixed-wing aircraft but, due to the present state of helicopter prediction, not for rotary-wing aircraft.

⁴P. D. Schomer and B. L. Homans, *User Manual: Interim Procedure for Planning Rotary-Wing Aircraft Traffic Patterns and Siting Noise-Sensitive Land Uses*, Interim Report N-10 (Construction Engineering Research Laboratory [CERL], 1976).

Because nighttime operations cause greater disturbance than daytime operations, the noise of each night event is penalized in the calculation procedure by 10 dB.⁵ That is, for the same average number of aircraft operations per hour during the day and night periods, the NEF value for nighttime operations is 10 dB higher than for daytime operations.⁶ Since the concept of NEF was introduced in the 1960s, the calculated NEF values around a given airfield have been lowered in absolute value by subtracting a constant (88) to avoid confusion with other noise measures such as the Composite Noise Rating (CNR) and the Community Noise Equivalent Level (CNEL).

The Day-Night Equivalent Level (L_{dn}) is also a measure of the 24-hour noise environment. L_{dn} uses the energy equivalent concept, which represents a fluctuating noise level in terms of a steady-state noise having the same amount of total energy. The specified time integration period is 24 hours.

In a similar although not absolutely equivalent fashion to NEF, a 10-dB correction is applied in the calculation of L_{dn} to account for the increased annoyance due to noise during the night.⁷ The noise level is measured in A-weighted sound pressure level.⁸

The Air Force prediction program contains several items common to all noise prediction models. These considerations or input factors, inherent in any aircraft noise impact prediction, include total number of operations (number of takeoffs and landings), percentage of night operations (between 2200 and 0700 hrs), and fleet mix (the percentage of each type of aircraft in operation). These factors must be estimated before any prediction methodology can be used.

Definitions of Terms

1. AGL—Above Ground Level.
2. Conflict with a noise-sensitive land use—A

⁵Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare With an Adequate Margin of Safety, Report 550/9-74-004 (Environmental Protection Agency [EPA], March 1974), pp A26-A28.

⁶K. S. Pearsons, et al., *Handbook of Noise Ratings*, Report N74-23275 (BBN, April 1974), pp 206-207.

⁷Information on Levels of Environmental Noise, pp A26-A28.

⁸K. S. Pearsons, et al., pp 224-225.

day-night equivalent level (L_{dn}) in excess of 65. The previous section provides more detail.

3. Ground distance—Distance along the ground measured from the projection of the aircraft on the ground to the observer (Figure 1).

4. Ingress/egress corridors—Approach and departure corridors (and other traffic corridors) where flight altitudes are less than the altitude AGL required to maintain a day-night equivalent level not exceeding 65.

5. LAE—A-weighted Sound Exposure Level.

6. Noise-sensitive area—An area containing one or more of the following: bachelor and family housing, temporary lodging, recreation, welfare and religious facilities designed for the assembly of groups of people, medical facilities, and school buildings.*

7. Operations

- a. In a traffic pattern, an operation is a takeoff or landing.
- b. In a corridor, an operation is a fly-by.
- c. Touch-and-go operations are counted as two operations.

8. Slant distance—The distance measured from the closest edge of the noise-sensitive facility to the center of the flight path (Figure 1).

9. Planning slant distance—The recommended slant distance which would insure that the noise-sensitive facility would not be subjected to an L_{dn} of greater than 65.

10. SEL—Sound Exposure Level is the time integral of the square of the acoustic pressure.

Approach

Originally, Construction Engineering Research Laboratory (CERL) researchers attempted to describe rotary-wing flight by using the computerized Air Force approach; that is, the flight tracks for each aircraft following each flight track were described using straight and curved arc sections. Altitude

*This procedure should not preclude siting a school in a noise-sensitive area when the school subject relates directly to the noise source, such as a pilot-training classroom at an airfield. Proper acoustical considerations must be incorporated into the design of the school.

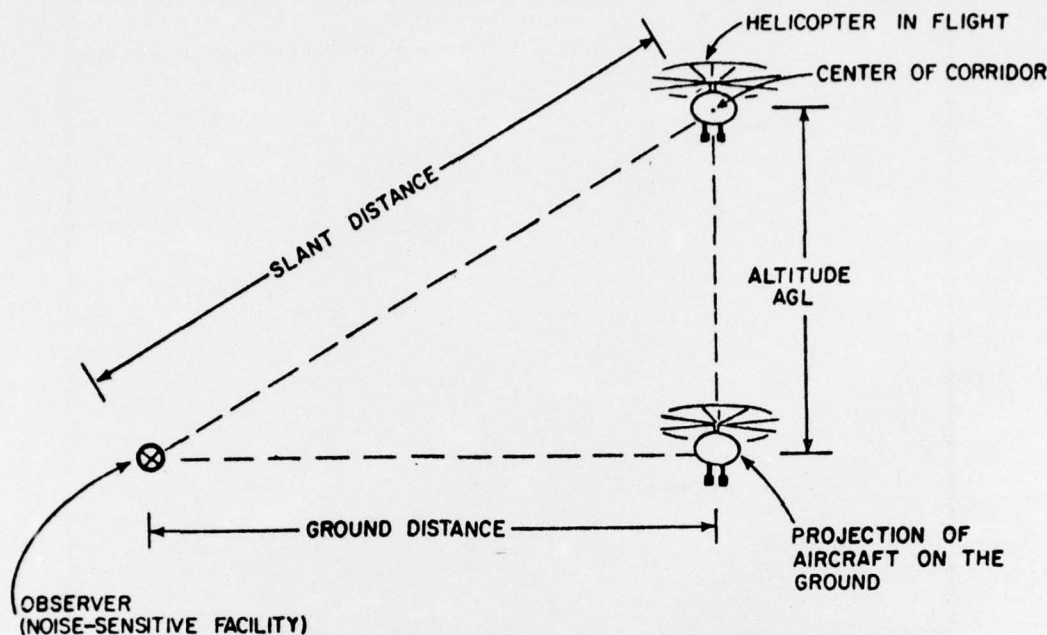


Figure 1. Illustration of the terms "ground distance" and "slant distance."

tude profiles and number of aircraft of each type following each flight track had to be specified.

The difficulty with using this procedure for helicopters was that it was extremely time-consuming. Since helicopters can, and do, fly almost anywhere, specific flight tracks must be defined for each helicopter path. Because of this position variability, a new approach was initiated.

Instead of detailing specific flight paths as in the computerized Air Force prediction procedure, it was decided in this study that distance criteria (based upon resulting L_{dn} and NEF values) for the placement of family housing and other noise-sensitive land uses would be developed from rotary-wing aircraft traffic patterns. These criteria could be easily understood and interpreted with the aid of the DOD documents discussed below.

The DOD *Air Installations Compatible Use Zones* (AICUZ) Instruction describes three zones of noise impact. Zone 3, the smallest and loudest, is the area in which the frequency of exposure and intensity are almost certain to produce difficulties in relation to some other possible use of the area, particularly where the use or proposed use is residential. Zone 2 is a larger area in which similar problems with

regard to other uses may occur. Zone 1, all land outside Zone 2, is an area in which essentially no such difficulties may be expected. NEF values above 40 are considered to be in Zone 3, values of 30 through 40 in Zone 2, and values below 30 in Zone 1.

The DOD *Construction Criteria Manual* recommends that bachelor and family housing, temporary lodging, recreation, welfare and religious facilities designed for the assembly of groups of people, and medical facilities should be sited in Zone 1. In addition, the Army requests that school facilities also be sited in Zone 1.*

The 15 October 1975 DOD letter, subject: *Air Installations Compatible Use Zone Noise Descriptors*⁹ amends the above two documents. The first change is to compute L_{dn} in place of CNR or NEF.

*This procedure should not preclude siting a school in a noise-sensitive area when the school subject relates directly to the noise source, such as a pilot-training classroom at an airfield. Proper acoustical considerations must be incorporated into the design of the school.

⁹P. J. Fliakas, Deputy Assistant Secretary of Defense, Installations and Housing—ID, *Air Installations Compatible Use Zone Noise Descriptors*, letter of 15 October 1975.

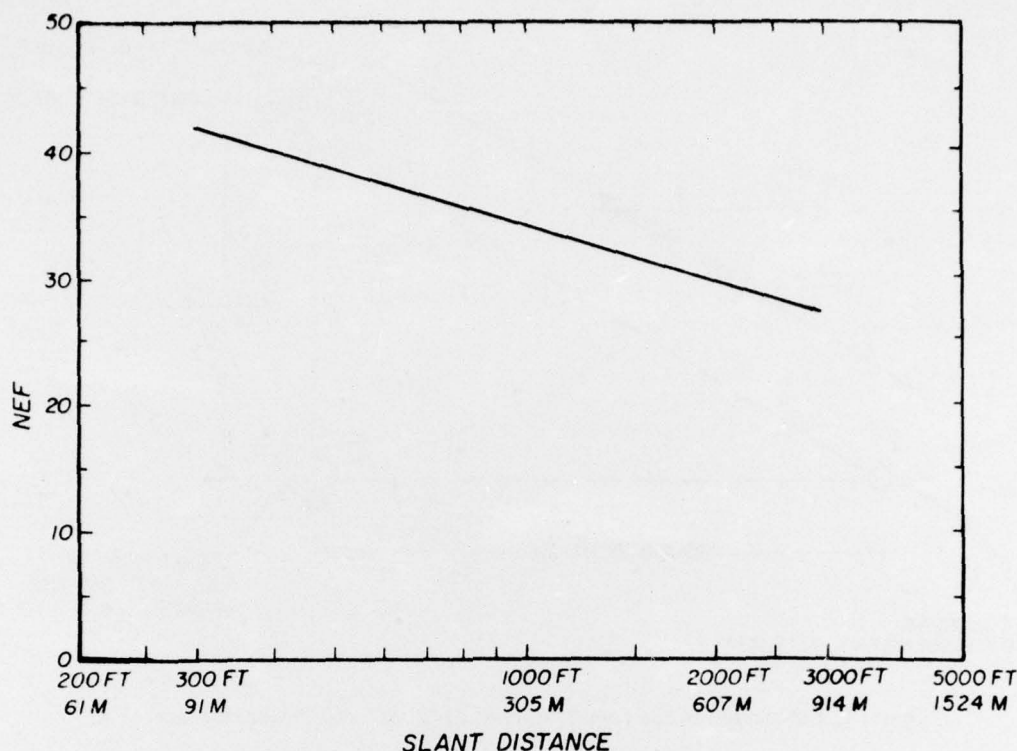


Figure 2. NEF vs slant distance plotted for distances between 300 and 3000 ft (91 and 914 m). The fleet mix is 80 UH-1s, 15 AH-1Gs, and 5 CH-47s with 10 percent of operations flown during the night.

The second is a recommended correction of +7 dB to be added to meter readings when helicopter noise levels are measured. Guidelines are given for the interpretation of L_{dn} zones: in excess of 75 L_{dn} is equivalent in impact to CNR Zone 3; the range of 65 L_{dn} to 75 L_{dn} is equivalent to CNR Zone 2; and below 65 L_{dn} is equivalent to CNR Zone 1.

Noise Exposure Forecast (NEF) was calculated for a variety of distances using the maximum Perceived Noise Level (PNL) values* for each aircraft and the time that the signal was high (within 10 dB of the maximum PNL value) at each distance. The approximate EPNL was calculated from the maximum PNL and the effective duration, which was estimated from the total 10-dB down duration. Figure 2 shows a curve of NEF versus distance for 100 aircraft. From the curve, distance values at NEF 40, 35, and 30 were found.

*Preliminary data for PNL curves were compiled from data from Bolt, Beranek and Newman (BBN), U.S. Army Environmental Hygiene Agency (AEHA), and CERL (CERL data, 1972).

L_{dn} was calculated using level flyover data measured by CERL.* Total Sound Exposure Level (LAE) was calculated from the A-weighted peaks and the time interval to the points 10 dB down from the peak, called duration. L_{dn} was found from LAE and the same operational data used for calculating NEF. As a check between the NEF and L_{dn} , distances were found for L_{dn} values of 75, 70, and 60. The two measures were found to be in close agreement.

Since no standard pattern exists, straight flight was assumed for estimation of time duration. In the traffic pattern, variations occur which can either increase or decrease the duration. It is felt that these factors generally cancel each other.

Appendix A discusses the calculations used in obtaining NEF and L_{dn} .

*These data were gathered from detailed measurements in spring 1974 and are unrelated to the PNL data discussed.

Operational Considerations

Operational data used in the calculation of the traffic pattern criteria were for average operations at a typical airfield. Total number of operations, percentage of nighttime operations, and fleet mix were considered as in any prediction methodology. The total number of operations was chosen to be 100 per day. This number was made larger than traffic encountered in the normal pattern to allow for future growth. Table 1 gives NEF and L_{dn} values for greater numbers of operations.

The percentage of nighttime rotary-wing operations was chosen to be 10 percent. Previous experience indicates that this figure accurately describes operations between 2200 and 0700 hrs at the typical airfield. It should be noted that increasing nighttime operations to 20 percent would raise the noise impact by about 2 NEF or L_{dn} units.*

The last of the general considerations—fleet mix—approximates ownership of aircraft by the Army. Since the missions of most airfields are dissimilar, a typical fleet mix was difficult to arrive at. A mix of 80 percent UH-1s, 15 percent AH-1Gs, and 5 percent CH-47s was determined to be sufficient. Changes in this mix, e.g., to 40 percent UH-1s, 40 percent OH-58s, 15 percent AH-1Gs, and 5 percent CH-47s, would affect the noise impact only slightly.

3 DERIVATION OF CRITERIA AND RESULTS

Calculation Procedures

Distance criteria were calculated using both NEF and L_{dn} as cross-checks of each other and of the procedure. Since EPNLs were unavailable for rotary-wing aircraft, PNLs were corrected as explained in Appendix A. Eq 1 was used in the calculation of NEF for each event.

$$NEF_i = \{EPNL_i + 10 \log [N_{di} + 16.67 (N_{ni})] - 88 + 7\} \quad [Eq 1]$$

where $EPNL_i$ = Effective Perceived Noise Level of event i
 N = Number of events per day (d) and night (n).

*Changes in nighttime operational levels are considered in Appendix B.

Table 1
Calculated NEF and L_{dn} Values With Corresponding Slant and Planning Slant Distances*

NEF		L_{dn}		Planning Slant Distance
NEF	Slant Distance	L_{dn}	Slant Distance	
a. 100 Average Daily Operations				
40	350 ft (107 m)	75	300 ft (91 m)	325 ft (99 m)
35	850 ft (259 m)	70	750 ft (229 m)	800 ft (244 m)
30	1800 ft (549 m)	65	1800 ft (549 m)	1800 ft (549 m)
b. 150 Average Daily Operations				
40	550 ft (183 m)	75	400 ft (122 m)	475 ft (152 m)
35	1100 ft (335 m)	70	1100 ft (335 m)	1100 ft (335 m)
30	2300 ft (701 m)	65	2500 ft (762 m)	2400 ft (732 m)
c. 200 Average Daily Operations				
40	650 ft (198 m)	75	500 ft (152 m)	575 ft (175 m)
35	1300 ft (396 m)	70	1400 ft (427 m)	1350 ft (411 m)
30	2900 ft (884 m)	65	3000 ft (914 m)	2950 ft (899 m)
d. 300 Average Daily Operations**				
40	800 ft (244 m)	75	750 ft (213 m)	775 ft (236 m)
35	1900 ft (579 m)	70	1800 ft (549 m)	1850 ft (564 m)

*Values based on fleet mix of 80 percent UH-1s, 15 percent AH-1Gs, and 5 percent CH-47s per 24-hour period with 10 percent of operations flown at night. Cruise speed is 80 to 90 kt (148 to 167 km/hr).

**This procedure is not intended for extremely large numbers of operations such as 300 or more. CERL should be consulted before applying these criteria in such cases.

The total NEF at a given ground position was determined by summing all the individual NEF_i values on an energy basis, as in Eq 2.

$$NEF = 10 \log \sum_{i=1}^n \left(10^{NEF_i/10} \right) \quad [Eq 2]$$

A correction factor of +7 dB was added to NEF to account for the relative annoyance of the spectrum of the helicopter and the fact that helicopters are usually turning and/or ascending or descending while in a traffic pattern or an ingress or egress corridor. (Appendix A provides a more detailed explanation.) Various slant distances were tried until NEF values of 40, 35, and 30 were obtained.

L_{dn} was calculated from CERL flyover data for the slant distances that were found to produce NEF values of 40, 35, and 30. The total A-weighted sound

exposure level (L_{AE}) for each flyover was calculated using

$$L_{AE} = \text{Max} - 4.25 + 10 \log T_o \quad [\text{Eq 3}]$$

where Max = A-weighted, slow, maximum level for the level flyover

T_o = Duration in seconds between the 10-dB down points from the maximum.

Eq 3 assumes a triangular approximation to the helicopter time history as explained in Appendix A. L_{dn} was calculated using

$$L_{dn} = \left[\sum_{i=1}^n (E_i + 10 \log N_d) \right. \\ \left. + \sum_{i=1}^n (E_i + 10 \log N_n + 10) \right] \\ - 10 \log 86400 + 7 \quad [\text{Eq 4}]$$

where $E_i = L_{AE}$ for event i

N = Number of events per day (d) and night (n)

86400 = Seconds per 24-hour period.

Appendix B shows sample calculations for NEF and L_{dn} .

Results

Table 1, which summarizes the calculation results for NEF and L_{dn} , shows NEF values of 40, 35, and 30 and L_{dn} values of 75, 70, and 65 with the corresponding distances found from calculations for various numbers of operations. Recommended planning slant distances to be used by planners are shown for the above NEF and L_{dn} values. As an example, it is recommended that an NEF of 35 (L_{dn} of 70) not be exceeded at a proposed building site located 800 ft (244 m) from a helicopter traffic pattern. The choice of these L_{dn} values is based on the AICUZ instruction and the DOD *Construction Criteria Manual* described earlier in this report.

The Environmental Protection Agency (EPA) states that for most environmental noise, NEF and L_{dn} are separated by 35 ± 2 dB.¹⁰ The calculated NEF and L_{dn} values therefore closely agree within these limits.

Applicability of Results

Corridors should be created for the anticipated maximum average daily number of operations. Table 1 gives recommended planning distances versus L_{dn} and NEF for 100, 150, 200, and 300 operations per day. It is felt that 100 is the minimum number of operations that should be used for planning purposes when actual daily operations exceed 10. Less than 10 operations per day should be ignored. The lower limit is designed to allow for landing pads at the hospital or base headquarters to be excluded from the planning requirements. This limit notwithstanding, patterns associated with main airfield or heliport operations in the vicinity of the airfield/heliport itself must be assessed.

4 CONCLUSION

The interim criteria presented in this report will closely identify the noise impact areas (those areas with an L_{dn} of 65 or greater) of existing or proposed helicopter traffic corridors and the ingress and egress patterns of airfields, heliports, or frequently used helipads. It is essential that the criteria and guidance presented in this report and its companion report, *User Manual: Interim Procedure for Planning Rotary-Wing Aircraft Traffic Patterns and Siting Noise-Sensitive Land Uses*, be used by the installation commands which support Army aviation activities. Proper master planning of compatible land use areas on and adjacent to the installations depends on adoption of the guidelines and criteria provided in these reports. Excess free land area around an existing airfield or heliport should not be used as an excuse for not implementing these guidelines and criteria.

¹⁰Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare With an Adequate Margin of Safety. Report 550/9-74-004 (EPA, March 1974).

APPENDIX A:

DISCUSSION OF CALCULATIONS

NEF

NEF was calculated using PNL data from helicopter overflights. Since EPNL is used in the calculation of NEF, it is necessary to convert maximum PNL and a measure of the duration to an approximation of EPNL.

Assuming a triangular shape of the PNL time history for values within 10 dB of the maximum value, the average value on an energy basis is about 4.25 dB below the maximum value. Considering the standard 10-sec duration used to calculate EPNL, this implies that

$$\text{EPNL} = (\text{Max PNL} - 4.25) + 10 \log_{10} T_0 / 10 [\text{Eq A1}]$$

where T_0 = the time duration between the points 10 dB below the maximum PNL point.

Within the primary range of interest, CERL data indicate approximate 10-dB down durations at 300 ft (91 m), 360 ft (110 m), and 500 ft (152 m) of 10 sec, 12 sec, and 17 to 18 sec, respectively, for a cruise speed of about 80 to 90 kt (148 to 167 km/hr). These values closely fit expected theoretical values. Calculations show that absorptive effects cause the duration relation to depart from theory significantly only at short distances (less than 300 ft [91 m]) and long distances (greater than 3000 ft [914 m]). In the middle distances, the relative absorption changes between the maximum value and the values at the 10-dB down point are almost identical (Figure A1).

A correction factor of +7 is added to all results to account for helicopter noisiness and turns. The helicopter spectrum includes impulsive blade slap and other phenomena which make rotary-wing aircraft more annoying than fixed-wing aircraft. The DOD letter of 15 October 1975, Subject: *Air Installations Compatible Use Zone Noise Descriptors* requires use of the 7-dB factor.

It was assumed that helicopters, while in a traffic pattern or ingress or egress corridor, would usually be turning and/or changing altitude rather than being in level flight. Since no published data are available on turns versus level cruise, CERL data were consulted. Tentative results from this analysis show that turns increase the A-weighted, slow, maximum reading by 4 to 5 dB. Therefore, the total addition factor to NEF and L_{dn} could be 4 or 5 dB if the added noise from turns only was considered, or could be as high as 12 dB if the combined effects of impulsiveness and turning were taken into account. A total correction factor of +7 dB seems to reflect a conservative compromise between the limits.

L_{dn}

In the calculation of L_{dn} , A-weighted, slow, maximum levels from two pairs of sideline microphones at slant distances of 360 and 500 ft (110 and 152 m) were corrected for the three distances that yielded NEF values of 40, 35, and 30. Assuming a triangular approximation of the time pattern shape of the helicopter time history within 10 dB of the maximum level, it is estimated that the average level is 4.25 dB below the maximum. L_{AE} and L_{dn} were calculated on an energy basis using Eq 3 and Eq 4. The total correction factor of +7 has been included as shown in Eq 4.

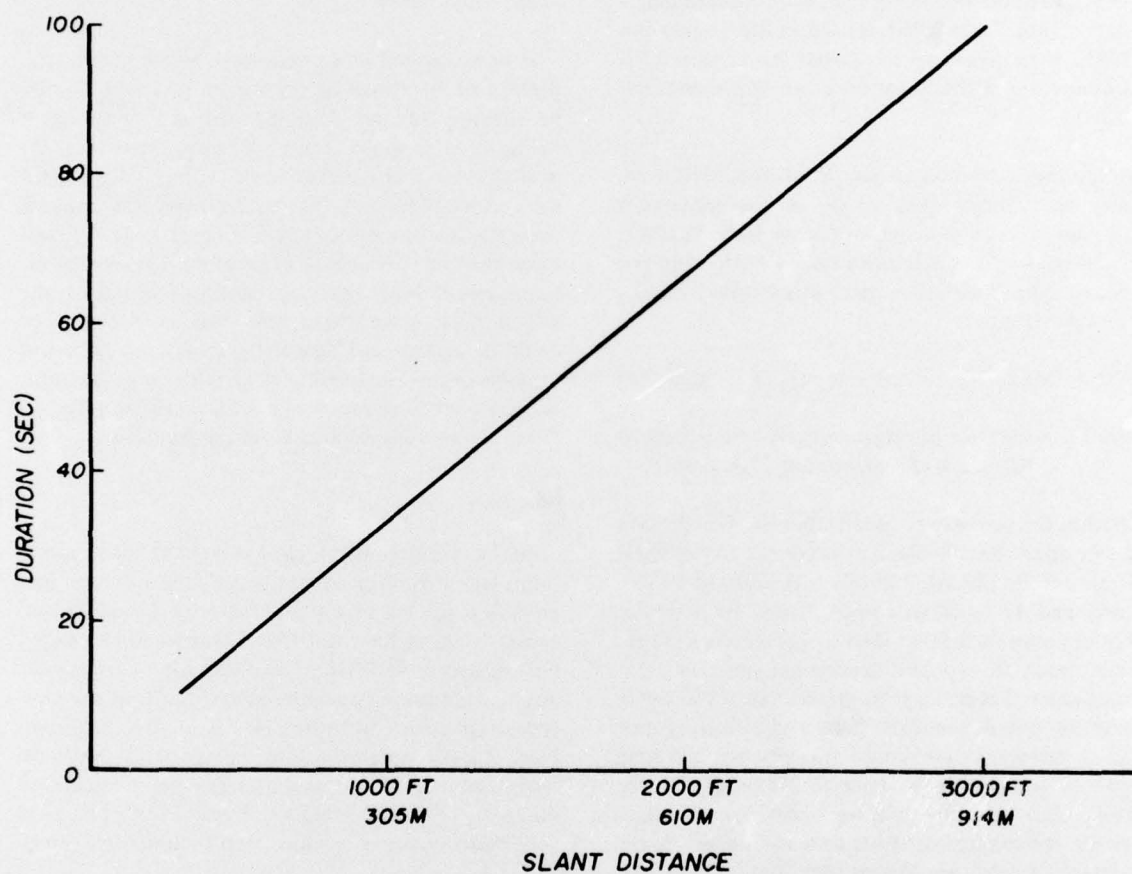


Figure A1. Expected duration between the points 10 dB down the maximum, slow, A-weighted level vs slant distance. Absorptive effects cause departure from theory below 300 ft (91 m) and above 3000 ft (914 m) slant distance.

APPENDIX B:

SAMPLE CALCULATIONS

Calculation of NEF

A simple example will demonstrate the calculation of NEF. Calculations will be performed for 100 total operations per 24-hour period with 10 percent of the flights during the night hours. Of the 100 operations, 80 will be UH-1s, 15 AH-1Gs, and 5 CH-47s (Table B1).

Table B1
Listing of Aircraft Used in Fleet Mix

Aircraft	Number of Aircraft per 24-Hour Period	
	Day (0700-2200 hrs)	Night (2200-0700 hrs)
UH-1	72.0	8.0
AH-1G	13.5	1.5
CH-47	4.5	0.5

Graphs of Perceived Noise Levels for level flight versus each aircraft type at a distance of 350 ft (107 m) were consulted. These levels will later be corrected for turns. EPNL can be found (as indicated in Appendix A) by using the PNL versus distance curves.

For this example, NEF will be calculated at 350 ft (107 m). By using Eq A1, PNL curves for each aircraft, and the durations plotted in Table A1, EPNL can be found as shown in Table B2 and the following calculations.

For

$$\begin{aligned} \text{UH-1: } \text{EPNL} &= 97 - 4.25 + 10 \log 11/10 = 93 \\ \text{AH-1G: } \text{EPNL} &= 107 - 4.25 + 10 \log 11/10 = 103 \\ \text{CH-47: } \text{EPNL} &= 98 - 4.25 + 10 \log 11/10 = 94 \end{aligned}$$

With this information, it is possible to calculate NEF from Eq 1:

$$\begin{aligned} \text{NEF} &= [93 + 10 \log (72 + 16.67 (8))] \\ &\quad + [103 + 10 \log (13.5 + 16.67 (1.5))] \\ &\quad + [94 + 10 \log (4.5 + 16.67 (0.5))] - 88 + 7 \\ \text{NEF} &= [116 + 119 + 105] - 88 + 7 \end{aligned}$$

Table B2

EPNL Values Calculated from PNL Data at 350 ft (107 m)

Aircraft	PNL at 350 ft (107 m)	EPNL at 350 ft (107 m)
UH-1	97	93
AH-1G	107	103
CH-47	98	94

Adding the numbers in brackets on an energy basis according to Eq 2 yields:

$$\text{NEF} = 121 - 88 + 7$$

$$\text{NEF} = 40$$

Similar calculations have been performed for a number of slant distances; the results are graphed in Figure 2. As can be seen, a slant distance of 350 ft (107 m) yields an NEF of 40. Table B3 demonstrates the change in noise impact given different percentages of night operations. This table demonstrates a relative insensitivity to the percentage of night operations in the range of 1 to 30 percent. Modification for this factor is not required.

Table B3
Approximate Modification to NEF or L_{dn} for a Change in the Percentage of Night (2200-0700 hrs) Operations to be Added to Values in Table 1

Percentage of Night Operations	Unit Correction to NEF or L_{dn}
0	-4
10	0
20	+2
30	+3
50	+5
100	+8

NOTE: This table demonstrates a relative insensitivity to the percentage of night operations in the range of 1 to 30 percent. Modification for this factor is not required.

Calculation of L_{dn}

L_{dn} was calculated from CERL flyover data (instead of tables) to produce similar results as for NEF.

For this example, the same total number of operations (100), percentage of night operations (10 percent), and fleet mix (80 percent UH-1s, 15 percent

AH-1Gs, and 5 percent CH-47s) will be used as for the NEF example. An L_{dn} at a slant distance of 750 ft (229 m) will be calculated. Aircraft were flying at 300 ft (91 m) AGL and data will be taken from one sideline microphone located at a ground distance of 400 ft (122 m) from the centerline (slant distance = 500 ft [152 m]).

The A-weighted, slow, maximum levels at 500 ft (152 m) slant distance can be normalized to any distance using Eq B1.

$$L_D = L_R - 20 \log (D/R) - \int_R^D a(s) ds \quad [\text{Eq B1}]$$

where D = Desired distance

R = Reference distance

a = Absorption per unit distance of the A-weighted spectrum (i.e., absorption is a function of spectrum which changes with distance).

At 750 ft (229 m), for example, it is estimated that the weighted absorption is 1 dB/1000 ft (0.0033 dB/m) for the helicopter spectrum. The level becomes

$$L_D = L_R - 20 \log (750/500) - (1.0/1000)(750-500)$$

$$L_D = L_R - 3.8$$

Table B4 presents the A-weighted, slow, maximum values at 500 and 750 ft (152 and 229 m) determined using the above correction. Figure B1 presents the maximum level relative to 500 ft (152 m) versus slant distance, including an estimation of the absorption effects.

Table B4

A-Weighted, Slow, Maximum Levels for the Aircraft Used

Aircraft	A-Weighted, Slow, Maximum Level	
	500 ft (152 m) Slant Distance	750 ft (229 m) Slant Distance
UH-1	82.5	79
AH-1G	87	83
CH-47	87	83

The typical duration between the point 10 dB down from the A-weighted, slow, maximum level at 500 ft (152 m), as found from CERL data, is about

16 sec, which indicates a 25-sec duration at 750 ft (229 m), as shown in Figure A1.

The time integral of the square of pressure (L_{AE}) can then be calculated for each aircraft at 750 ft (229 m) using Eq 3:

$$\text{UH-1: } L_{AE} = 79 - 4.25 + 10 \log (25) = 89$$

$$\text{AH-1G: } L_{AE} = 83 - 4.25 + 10 \log (25) = 93$$

$$\text{CH-47: } L_{AE} = 83 - 4.25 + 10 \log (25) = 93$$

$$\text{where } L_{AE} = 1/t_0 \int_0^{t_0} P_A^2(t) dt \quad (t_0 = 1 \text{ sec})$$

L_{dn} can be easily calculated using the number of aircraft from Table B1 and Eq 4:

$$L_{dn} = \left[\sum_{i=1}^n (L_{AEi} + 10 \log N_d) \right]$$

$$+ \sum_{i=1}^n (L_{AEi} + 10 \log N_n + 10)]$$

$$- 10 \log 86400 + 7$$

Substituting,

$$L_{dn} = [(89 + 10 \log(144)) + (93 + 10 \log(27))$$

$$+ (93 + 10 \log(9)) + (89 + 10 \log(16) + 10)$$

$$+ (93 + 10 \log(3) + 10) + (93 + 10 \log(0.1) + 10)]$$

$$- 10 \log 86400 + 7$$

yields

$$L_{dn} = [108 + 104 + 100 + 108 + 105 + 100]$$

$$- 10 \log 86400 + 7$$

Adding the numbers in brackets on an energy basis according to Eq 2 yields:

$$L_{dn} = 113 - 10 \log 86400 + 7$$

$$L_{dn} = 70$$

After 35 is subtracted (as suggested by the EPA), this L_{dn} value is in close agreement with NEF results calculated from published data.

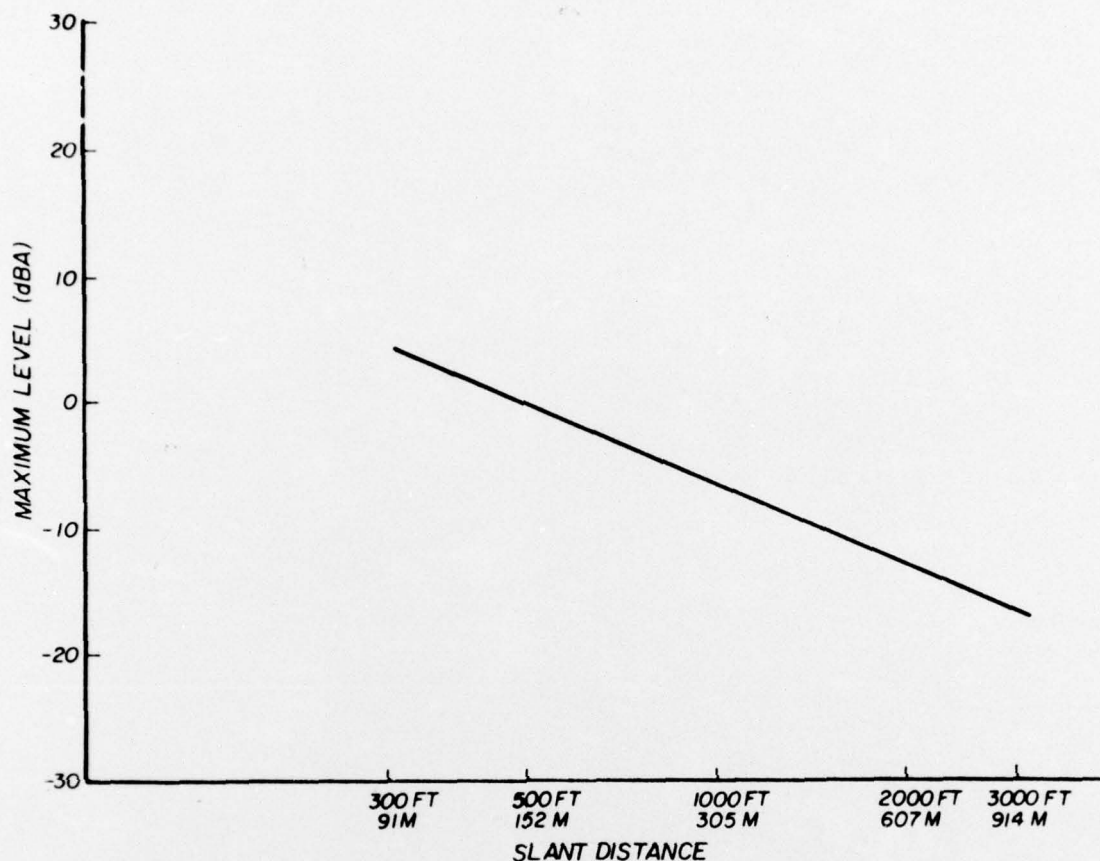


Figure B1. Estimation of the maximum, slow, A-weighted level relative to 500 ft (152 m) vs slant distance for rotary-wing aircraft.

REFERENCES

- Air Installations Compatible Use Zones*, DOD Instruction 4165-57 (Department of Defense).
- Construction Criteria Manual*, DOD 4270.1-M (Department of Defense).
- Fliakas, P. J., Deputy Assistant Secretary of Defense, Installations and Housing—ID, *Air Installations Compatible Use Zone Noise Descriptors*, letter of 15 October 1975.
- Horonjeff, R. D., et al., *Community Noise Exposure Resulting From Aircraft Operations: Computer Program Description*, Report AD/A-004821 (Bolt, Beranek and Newman [BBN], 1974).
- Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare With an Adequate Margin of Safety*, Report 550/9-74-004 (Environmental Protection Agency, March 1974).
- Pearsons, K. S., et al., *Handbook of Noise Ratings*, Report N74-23275 (BBN, April 1974).
- Schomer, P. D. and B. L. Homans, *User Manual: Interim Procedure for Planning Rotary-Wing Aircraft Traffic Patterns and Siting Noise-Sensitive Land Uses*, Interim Report N-10 (Construction Engineering Research Laboratory, 1976).

ENA

CERL DISTRIBUTION

Picatinny Arsenal
ATTN: SMUPA-VP3

US Army, Europe
ATTN: AEAEN

Director of Facilities Engineering
APO New York 09827

DARCOM STIT-EUR
APO New York 09710

HQDA (SGRD-EDE)

Chief of Engineers
ATTN: Tech Monitor
ATTN: DAEN-ASI-L (2)
ATTN: DAEN-FEB
ATTN: DAEN-FEP
ATTN: DAEN-FESA
ATTN: FEZ-A
ATTN: DAEN-MCZ-S
ATTN: DAEN-RDL
ATTN: DAEN-PMS (7)

for forwarding to
National Defense Headquarters
Director General of Construction
Ottawa, Ontario K1A0K2
Canada

Canadian Forces Liaison Officer (4)
U.S. Army Mobility Equipment
Research and Development Command
Ft Belvoir, VA 22060

Div of Bldg Research
National Research Council
Montreal Road
Ottawa, Ontario, K1A0R6

Airports and Const. Services Dir.
Technical Information Reference
Centre
KAOL, Transport Canada Building
Place de Ville, Ottawa, Ontario
Canada, K1A0N8

Aberdeen Proving Ground, MD 21005
ATTN: AMXHE/J. D. Weisz

Ft Belvoir, VA 22060
ATTN: Kingman Bldg, Library

Ft Monroe, VA 23651
ATTN: ATEN

Ft McPherson, GA 30330
ATTN: AFEN-FEB

USA-WES
ATTN: Library

6th US Army
ATTN: AFKC-LG-C

US Army Engineer District
New York
ATTN: Chief, Design Br
Philadelphia
ATTN: Library
ATTN: Chief, NAPEN-E
Baltimore
ATTN: Chief, Engr Div
Norfolk
ATTN: Chief, NADEN-D
Huntington
ATTN: Chief, ORHED

US Army Engineer District
Wilmington

ATTN: Chief, SWAEN-D

Savannah

ATTN: Library

ATTN: Chief, SASAS-L

Mobile

ATTN: Chief, SAMEN-D

Memphis

ATTN: Library

Louisville

ATTN: Chief, Engr Div

Detroit

ATTN: Library

St. Paul

ATTN: Chief, ED-D

Rock Island

ATTN: Library

ATTN: Chief, Engr Div

St. Louis

ATTN: Library

ATTN: Chief, ED-D

Kansas City

ATTN: Library (2)

Omaha

ATTN: Chief, Engr Div

New Orleans

ATTN: Library

ATTN: Chief, LMNED-DG

Little Rock

ATTN: Chief, Engr Div

Tulsa

ATTN: Chief, Engr Div

ATTN: Library

Fort Worth

ATTN: Library

ATTN: Chief, SWFED-D

Albuquerque

ATTN: Library

San Francisco

ATTN: Chief, Engr Div

Sacramento

ATTN: Chief, SPKED-D

Far East

ATTN: Chief, Engr Div

Japan

ATTN: Library

Portland

ATTN: Library

Seattle

ATTN: Chief, EN-DB-ST

Walla Walla

ATTN: Library

ATTN: Chief, Engr Div

Alaska

ATTN: Library

ATTN: NPADE-R

US Army Engineer Division

Europe

ATTN: Technical Library

New England

ATTN: Chief, NEDED-T

ATTN: Library

North Atlantic

ATTN: Chief, NADEN-T

Middle East (Rear)

ATTN: MEDED-T

South Atlantic

ATTN: Chief, SADEN-TS

ATTN: Library

Huntsville

ATTN: Library (2)

ATTN: Chief, HNDED-CS

ATTN: Chief, HNDED-SR

Lower Mississippi Valley

ATTN: Library

US Army Engineer Division
Ohio River

ATTN: Chief, Engr Div

ATTN: Library

North Central

ATTN: Library

Missouri River

ATTN: Library (2)

ATTN: Chief, MRDED-T

Southwestern

ATTN: Library

ATTN: Chief, SWDED-T

South Pacific

ATTN: Chief, SPDED-TG

Pacific Ocean

ATTN: Chief, Engr Div

North Pacific

ATTN: Chief, Engr

Facilities Engineers

Ft Campbell, KY 42223

FORSCOM

Ft Devens, MA 01433

Ft Carson, CO 80913

Ft Lewis, WA 98433

USAECON

Ft Monmouth, NJ 07703

USAIC (2)

Ft Benning, GA 31905

USAAVNC

Ft Rucker, AL 36361

CAC&L

Ft Leavenworth, KS 66027

USACC

Ft Huachuca, AZ 85613

TRADOC

Ft Monroe, VA 23651

Ft Gordon, GA 30905

Ft Sill, OK 73503

Ft Bliss, TX 79916

HQ, 1st Inf Div & Ft Riley, KS 66442

HQ, 5th Inf Div & Ft Polk, LA 71459

HQ, 7th Inf Div & Ft Ord, CA 93941

AF/PREEU

Bolling AFB, DC 20332

AF Civil Engr Center/XRL

Tyndall AFB, FL 32401

Little Rock AFB

ATTN: 314/DEEE (Mr. Gillham)

Jacksonville, AR 72076

US Naval Oceanographic Office

WASH DC 20373

Naval Air Systems Command

WASH DC 20360

NAVFAC/Code 04

Alexandria, VA 22332

Port Hueneme, CA 93043

ATTN: Library (Code LOBA)

Washington, DC

ATTN: Building Research Advisory Board

ATTN: Transportation Research Board

ATTN: Library of Congress (2)

ATTN: Dept of Transportation Library

Defense Documentation Center (12)

Engineering Societies Library

New York, NY 10017

HQ FORSCOM
ATTN: AFEN-EQ/Robert Jarret
Ft. McPherson, GA 30330

U.S. Army Eng District, Ft. Worth
ATTN: Derwood Jones
ATTN: Tom E. Hay
ATTN: Bill G. Daniels
ATTN: Royce W. Mullens, Water
Resource Planning
Environmental Resources Section
P.O. Box 17300
Ft. Worth, TX 76102

Aeronautical Service Office
USA Air Traffic Control Activity
ATTN: Mr. Brooks
Cameron Station
Alexandria, VA 22314

DFAE Envir Quality Section
ATTN: Mike Halla
Fort Carson, CO 80192

Commander
Ft. Sill
ATTN: DFAE/D. Hergenrether
Ft. Sill, OK 73503

Human Engr Lab
ATTN: George Garinther
Aberdeen Proving Ground, MD 21005

Director
US Army Engr Waterway Exp Sta
ATTN: Jack Stoll/WESSE
PO Box 631
Vicksburg, MS 39180

HQ US Army Materiel
DARCOM
ATTN: DRCPA-E/E. Proudman
ATTN: J. Pace
501 Eisenhower Ave
Alexandria, VA 22333

US Army Envir Hygiene Agency
ATTN: CPT George Luz/BioAcoustics
Aberdeen Proving Ground, MD 21010

US Training and Doctrine Command
ATTN: ATEN-FE-E/D. Dery
ATTN: James L. Aikin, Jr.,
Chief, Environmental Branch
Ft. Monroe, VA 23651

US Army Aeromedical Research Lab
ATTN: Robert T. Camp, Jr.
ATTN: CPT J. Peterson
Box 577
Fort Rucker, AL 36360

Commander
Fort Belvoir
ATTN: Sam Wehr
ATTN: Paul Hopler
System & Components Branch
Ft. Belvoir, VA

US Army Corps of Engineers
South Atlantic Div
ATTN: SDACO-H/B. Alley
510 Title Bldg
30 Pryor St
Atlanta, GA 30303

HQ US Army Forces Command
Office of the Engineer (AFEN-EQ)
ATTN: Robert Montgomery
Fort McPherson, GA 30330

US Army Medical Bioengineering
R&D Laboratory
Environmental Protection Research
Division
ATTN: LTC LeRoy H. Reuter
Fort Detrick
Frederick, MD 21701

Chief of Engineers
ATTN: DAEN-MCE-A/W. B. Holmes
ATTN: DAEN-MCC-E/D. Spivey
ATTN: DAEN-MCC-E/P. Van Parys
ATTN: DAEN-MCE-P/F. P. Beck
ATTN: DAEN-MCE-P/J. Halligan
ATTN: DAEN-ZCE-D/D. M. Benton (2)
Dept of the Army
WASH DC 20314

Director
6570 AMRL/BBE
ATTN: Dr. H. Von Gierke
ATTN: Jerry Speakman
ATTN: LTC D. Johnson, BBA
Wright-Patterson AFB, OH 45433

HQ USAF/PREXX
Pentagon
ATTN: LTC Menker
WASH DC 20330

Nav Undersea Center, Code 401
ATTN: Bob Gales
ATTN: Bob Young
San Diego, CA 92132

Naval Air Station
ATTN: Ray Glass/Code 661
ATTN: Mark Longley-Cook/Code 66102
Building M1
Naval Air Rework
North Island, CA 92135

MAJ Robert Dettling
US AF-ETAC/ENB
Bldg 159
Navy Yard Annex
WASH DC 20333

Naval Facilities Engineering
Command
ATTN: David Kurtz
Code 2013C
Hoffman #2
200 Stovall St
Alexandria, VA 22332

Chief of Naval Operations
ATTN: LTJG R. F. Krochalis
200 Stovall St
Alexandria, VA 22332

Federal Aviation Administration
ATTN: Mr. C. Foster/AEQ
ATTN: ARD-530/J. McCullough
ATTN: H. B. Safeer, Chief
Envir Policy Div
ATTN: AEQ 220/Larry Bedoure
ATTN: AEQ 200/Dick Tedrick
800 Independence Ave SW
WASH DC 20591

National Bureau of Standards
ATTN: Curtis I. Holmer
ATTN: Dan R. Flynn
ATTN: Arthur I. Rubin
ATTN: Simone Yaniv, Bldg 226,
Room A313
WASH DC 20234

Federal Highway Administration
ATTN: C. Van Bevers
Region 15 Office
1000 N. Glebe Rd
Arlington, VA 22201

Bureau of National Affairs
1231 25th St NW
ATTN: Fred Blosser
Room 462
WASH DC 20037

Office of Noise Abatement
ATTN: Gordon Banerian
Office of the Secretary
400 7th St SW
WASH DC 20590

Department of Housing & Urban
Development
ATTN: George Winzer
Ch. Noise Abatement Program
Office of Res & Tech
WASH DC 20410

NASA
ATTN: H. Hubbard
ATTN: D. Maglieri
ATTN: Dave Hilton
Hampton, VA 23365

EPA Noise Office
ATTN: Al Hicks, Room 2113
John F. Kennedy Federal Bldg
Boston, MA 02203

EPA Noise Division
ATTN: Bob Hellweg
ATTN: J. Reid
2200 Churchill Rd
Springfield, IL 62706

Environmental Protection Agency
ATTN: George Putnicki
1600 Patterson
Dallas, TX 75201

Environmental Protection Agency
ATTN: Tom O'Hare
Noise Office (Rm 907G)
26 Federal Plaza
New York, NY 10007

EPA Region III Noise Program
ATTN: Pat Anderson
Curtis Bldg, 6th & Walnut
Philadelphia, PA 19106

Environmental Protection Agency
ATTN: AW-471/Cosimo Caccavari
ATTN: AW-471/H. Nozick
ATTN: AW-471/A. Konhelm
ATTN: AW-471/L. C. Gray
ATTN: AW-471/J. Shampian
ATTN: R. Marrazzo
ATTN: Fred Mintz, Aircraft
Noise Regulation Officer
ATTN: Basil Manns
ATTN: William Sperry
ATTN: J. Goldstein
ATTN: D. Gray
WASH DC 20460

Environmental Protection Agency
ATTN: Robert A. Simmons
Rocky Mountain-Prairie Region
Suite 901 Lincoln Bldg
1860 Lincoln St
Denver, CO 80203

EPA Noise Office (Room 109)
ATTN: Dr. Kent Williams
1421 Peachtree St
Atlanta, GA 30309

Illinois Environmental Protection
Agency
DNPC/Greg Zak
2200 Churchill Rd
Springfield, IL 62706

Kentucky Department of Labor
ATTN: John Summersett
Div of Educational Training
Frankfort, KY 40601

International Harvester
ATTN: Walter Page
7 South 600 County 1 Mile Rd
Hinsdale, IL 60521

Joiner-Pelton-Rose, Inc.
ATTN: Jack R. Rindorff
10110 Monroe Drive
Dallas, TX 75229

Kamperman Associate, Inc.
ATTN: George Kamperman
1110 Hickory Trail
Downers Grove, IL 60515

Paul Borsky
367 Franklin Avenue
Franklin Square, NY 11610

Tom Gutman
1921 Jefferson Davis Hwy
Crystal Mall, Bldg 2
Arlington, VA 20620

Booz-Allen Applied Research Div
ATTN: Robert L. Hershey, P.E.
4733 Bethesda Ave
Bethesda, MD 20014

Lee E. Gates
2266 East Rd
Mobile, AL 36609

Green Construction Co.
Charlie E. Sanders, VP
Equipment & Purchasing
1321 Walnut St
Des Moines, IA 50309

Cedar Knolls Acoustical Lab
ATTN: Dick Guernsey
9 Saddle Rd
Cedar Knolls, NJ 07927

Ms. Charollette Rines
1921 Jefferson Davis Hwy
Crystal Mall #2
Room 1105
Arlington, VA 20460

Sensory Sciences Research Ctr
ATTN: Karl Kryter
ATTN: Jim Young
333 Ravenwood Ave
Menlo Park, CA 94025

College of Law
ATTN: Mr. Plager
University of Illinois
Champaign, IL 61820

General Motors Proving Ground
ATTN: Ralph K. Hillquist
Milford, MI 48042

Bolt Beranek & Newman, Inc.
ATTN: Kenneth M. Eldred
50 Moulton St
Cambridge, MA 02138

Bolt Beranek & Newman, Inc.
ATTN: Dr. B. Galloway
ATTN: Dr. S. Fidell
ATTN: Dr. Pearsons
21120 Vanowen St
PO Box 633
Canoga Park, CA 91305

Engineering Dynamics, Inc.
ATTN: Robert C. Chanaud
Noise & Vibration
6651 South Wellington Ct
Littleton, CO 80121

Georgia Institute of Technology
Department of City Planning
ATTN: Clifford Bragdon
Atlanta, GA 30083

Dames & Moore
ATTN: Dr. Frederick M. Kessler
6 Commerce Drive
Cranford, NJ 07016

Bonitron, Inc.
ATTN: Robert W. Benson
2670 Sidco Drive
Nashville, TN 37204

Westinghouse Electrical Corp
Research & Development Ctr
ATTN: Jim B. Moreland
Churchill Boro
Pittsburg, PA 14235

Systems Technology Corp
ATTN: Gregor Rigo
245 N. Valley Rd
Xenia, OH 45385

Daniel Queen
5524 Gladys Ave
Chicago, IL 60644

Sandia Corporation
ATTN: Jack Reed
PO Box 5800
Albuquerque, NM 87115

Society of Automotive Engrs
ATTN: William J. Toth
400 Commonwealth Dr
Warrendale, PA 15096

Wyle Labs
ATTN: L. Sutherland
128 Maryland St
El Segundo, CA 90245

Consolidated Edison Co., of NY
ATTN: Allan Teplitzky
4 Irving Plaza
New York, NY 10003

Pennsylvania State University
101 Engineering A Bldg
University Park, PA 16802